

REV.	DESCRIPTION	DATE	DRAWN
A	New	18.05.2018	Cherry

Order Code
SLS-xxx-S562-55/2

No. of Pins	Dimension mm		
	A	B	C
006	13.20	12.10	4.00
008	15.20	14.10	6.00
010	17.20	16.10	8.00
012	19.20	18.10	10.00
014	21.20	20.10	12.00
016	23.20	22.10	14.00
018	25.20	24.10	16.00
020	27.20	26.10	18.00
022	29.20	28.10	20.00
024	31.20	30.10	22.00
026	33.20	32.10	24.00
028	35.20	34.10	26.00
030	37.20	36.10	28.00
032	39.20	38.10	30.00
034	41.20	40.10	32.00
036	43.20	42.10	34.00
040	47.20	46.10	38.00
044	51.20	50.10	42.00
050	57.20	56.10	48.00
060	67.20	66.10	58.00
064	71.20	70.10	62.00
068	75.20	74.10	66.00







Specifications

Electrical

Current rating: 1.0A
Insulation resistance: 1000MΩ min. @500V DC
Withstanding voltage: 800V AC

Material

Contact: Copper Alloy
Plating: Gold flash over Nickel
Insulator: PBT (black) UL 94V-0
Operating temperature: -55°C to +105°C

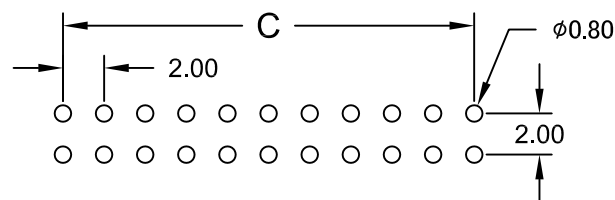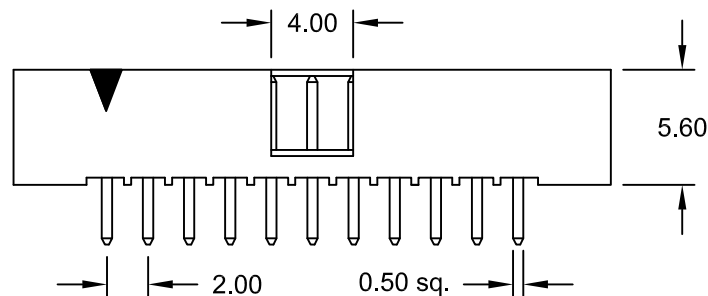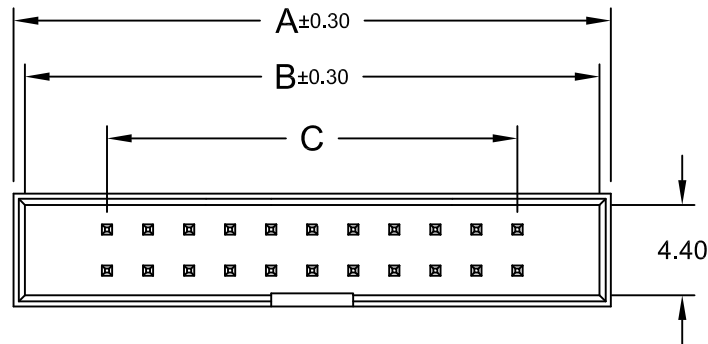

Recommended PCB Layout
(Tolerance ±0.05)

E-tec 2018 © - all rights reserved www.e-tec.asia



UNIT mm	GENERAL TOLERANCE		DRAWN Cherry	DATE 18.05.2018	DWG. NO. SLS-S562/2	SHEET 1/1
	SCALE Free	X.° ±	X. ±			
		.X° ±	.X ±			
		.XX° ±	.XX ± 0.20			
		.XXX° ±	.XXX ±	APPROVE Hogi	DATE 18.05.2018	SERIES NO. SLS-xxx-S562-xx/2

THT Box Header
2.00mm pitch - dual row
straight