


REV.	DESCRIPTION	DATE	DRAWN
A	NEW	08.06.2015	Ryan

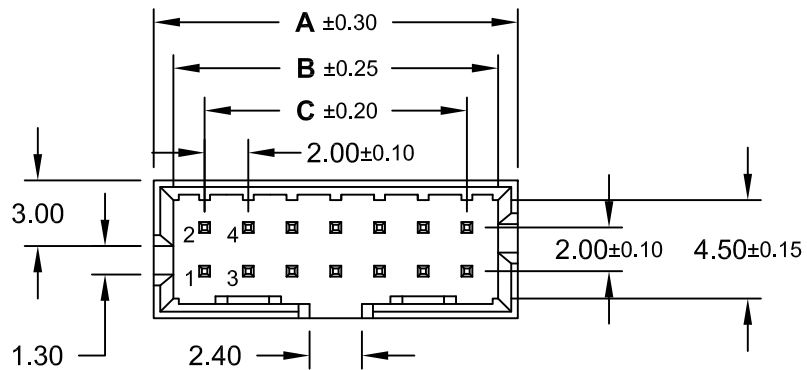




Order Code
SLS-xxx-S640-xx/2

Plating

55 = Gold flash (Standard)
66 = 10µ" Gold
77 = 15µ" Gold
88 = 30µ" Gold
99 = Tin

Duplex plating
95 = Tin/Gold flash
96 = Tin/10µ" Gold
97 = Tin/15µ" Gold
98 = Tin/30µ" Gold

No. of Pin	Dimension(mm)				
	A	B	C	E	D
014	16,65	14,85	12,00	8,00	15,00
016	18,65	16,85	14,00	10,00	17,00
020	22,65	20,85	18,00	14,00	21,00
024	26,65	24,85	22,00	18,00	25,00
026	28,65	26,85	24,00	20,00	27,00
030	32,65	30,85	28,00	24,00	31,00
034	36,65	34,85	32,00	28,00	35,00
040	42,65	40,85	38,00	34,00	41,00
044	46,65	44,85	42,00	38,00	45,00
050	52,65	50,85	48,00	44,00	51,00
060	62,65	60,85	58,00	54,00	61,00

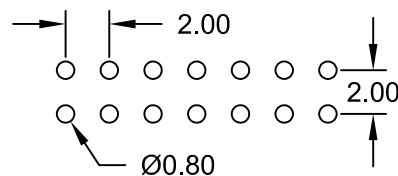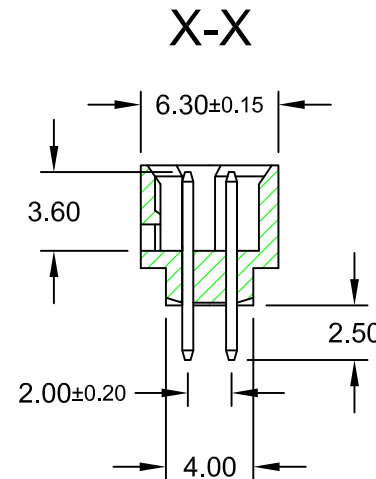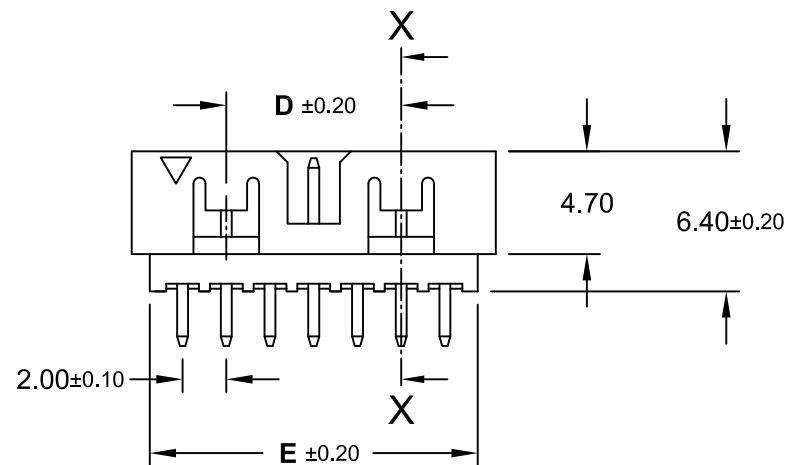

Recommended PCB Layout
(PCB TOLERANCE ±0.05)



Specifications

Electrical

Current rating: 2A
Insulation resistance: 1000MΩ min.
Withstanding voltage: 500V AC/DC
Contact resistance: 20mΩ max.

Material

Contact: Brass

Plating: Gold, Tin or Duplex

*Duplex = Gold plated on contact area,
Tin on solder area

Insulator: Nylon 9T (black) UL 94V-0

Operating temperature: -40°C to +105°C



UNIT	mm	GENERAL TOLERANCE	
SCALE	Free	X.° ±	X. ±
		.X° ±	.X ±
		.XX° ±	.XX ± 0.25
		.XXX° ±	.XXX ±

DRAWN	Ryan	DATE	08.06.2015
CHECK	Ronny	DATE	08.06.2015
APPROVE	Hogi	DATE	08.06.2015

DWG. NO.	SHEET 1/1
SLS-S640/2	REV. A
SERIES NO.	
SLS-xxx-S640-xx/2	

THT Box Header straight
2.00mm pitch dual row
6.40mm height hi temp insulator