



REV.	DESCRIPTION	DATE	DRAWN
A	New	11.01.2007	RH
B	update	24.06.2013	Ronny
C	general update	31.03.2022	Cherry

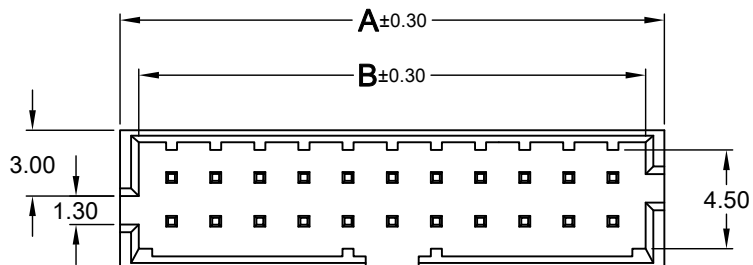



08~12 Pins




Order Code
SLS-xxx-SM640-xx/2

Plating

55 = Gold flash
77 = 15µ" Gold

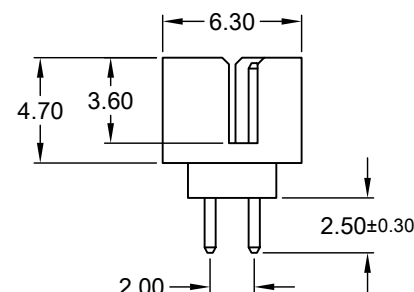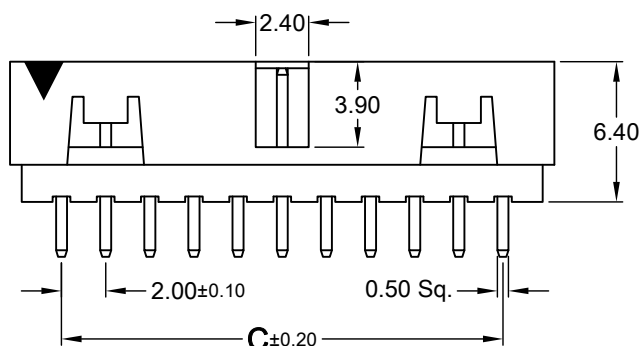

No. of Pins	Dimension mm		
	A	B	C
008	10.65	8.85	6.00
010	12.65	10.85	8.00
012	14.65	12.85	10.00
014	16.65	14.85	12.00
016	18.65	16.85	14.00
020	22.65	20.85	18.00
024	26.65	24.85	22.00
026	28.65	26.85	24.00
030	32.65	30.85	28.00
034	36.65	34.85	32.00
040	42.65	40.85	38.00
044	46.65	44.85	42.00
050	52.65	50.85	48.00

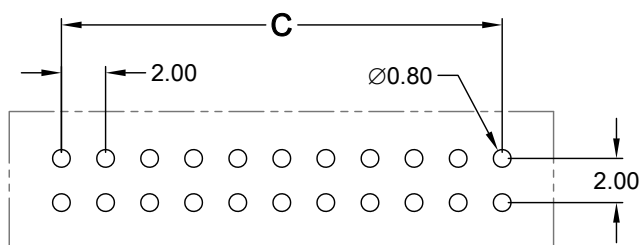

Recommended PCB Layout Top View
(Tolerance ±0.05)

Specifications

Electrical

Current rating: 1A
Insulation resistance: 1000MΩ min. @500V DC
Contact resistance: 30mΩ max.
Withstanding voltage: 800V AC

Material

Contact: Brass
Plating: Au flash over Ni
Insulator: PA6T (black) UL 94V-0
Operating temperature: -55°C to +105°C



E-tec 2022 © - all rights reserved www.e-tec.asia



UNIT	mm	GENERAL TOLERANCE	
SCALE	Free	X.° ±	X. ±
		.XX° ±	.XX ±
		.XX° ±	.XX ± 0.20
		.XXX° ±	.XXX ±

DRAWN	Ronny	DATE	11.01.2007
CHECK	Ronny	DATE	01.04.2022
APPROVE	Fagi	DATE	01.04.2022

DWG. NO.	SLS-SM640/2	SHEET 1/1
SERIES NO.	SLS-xxx-SM640-xx/2	REV. C

THT Box Header
2.00mm Pitch - Dual Row
6.40mm height - Straight